

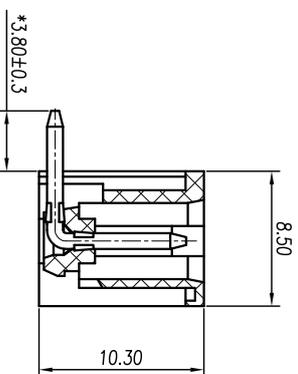


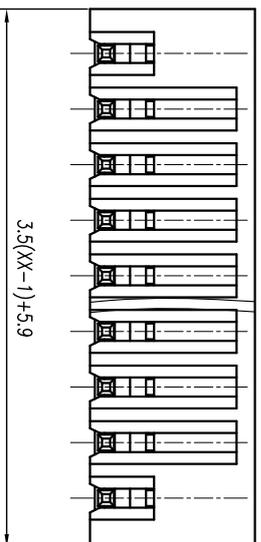


慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

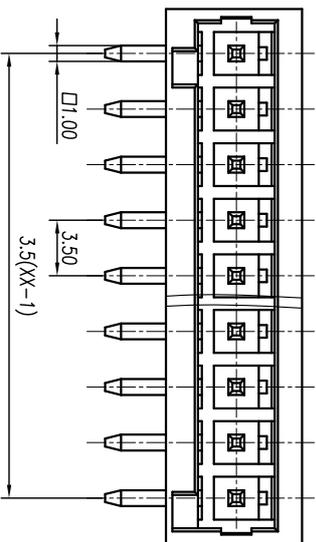

参考标准 / Standard	UL	IEC
额定电压 / Rated voltage	300V	130V
额定电流 / Rated current	10A	10A
接触电阻 / Contact resistance	20mΩ	
绝缘电阻 / Insulation resistance	500MΩ / DC500V	
耐压 / With standing voltage	AC 2000V/1 Min	
机械性能 / Mechanical		
温度范围 / Temp. Range	-40°C--+105°C	
瞬时温度 / MAX Soldering	+250°C for 5 Sec	
尺寸 / Dimensions		
间距 / Pitch	3.5mm	
极数 / Poles	2-24p	
材质及电镀 / Material	PA66, UL94V-0	
塑料 / Housing	Brass, Tin plated	
焊脚 / Pin header		



linear dimension (Tolerances Standard GB/T 14486-2008)	over 6	over 10	over 18	over 30	over 50	over 80	over 120	over 160	over 200	over 250	all	over 5	over 30	over 120		
	to 10	to 18	to 30	to 50	to 80	to 120	to 160	to 200	to 250	to 5	to 30	to 120				
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 2:1

第三视角 THIRD ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称 / TITLE

WJ0202-02XX-1YY-00A