

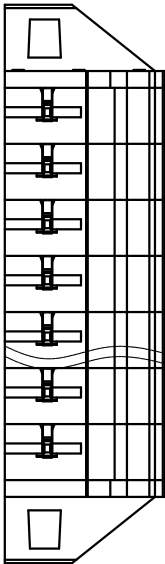
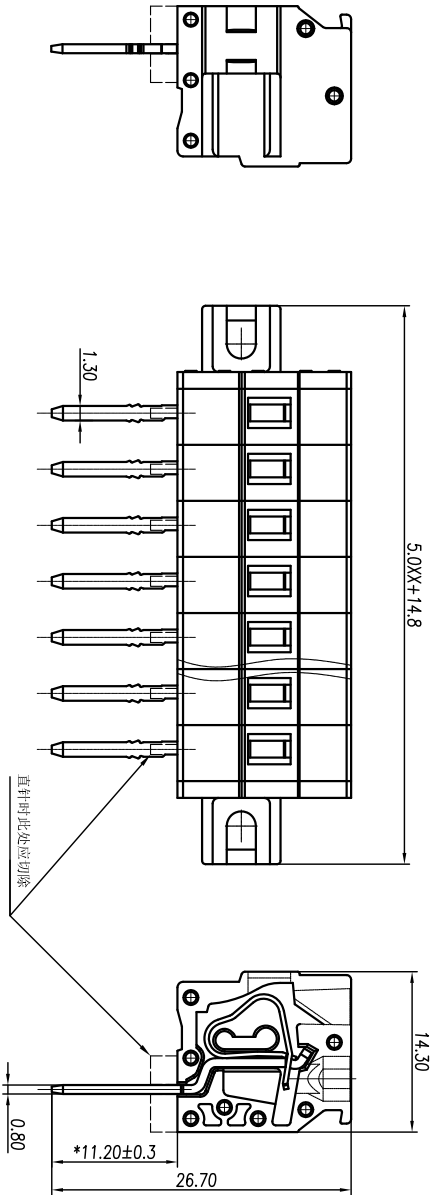




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

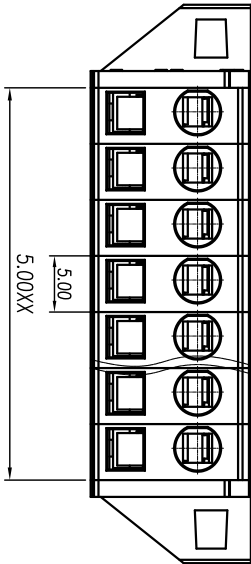

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	250V
额定电流/Rated current	15A	16A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	28~12AWG	2.5mm ²
耐压/Wrth standing voltage	AC 2000V/1 Min	
机械性能/Mechanical		
剥线长度/Steip Length	8.9mm	
温度范围/Temp.Range	-40℃~+105℃	
尺寸/Dimensions		
间距/Pitch	5mm	
极数/Poles	2-24p	
材质及电镀/Material		
塑件/Housing	PA66, UL94V-0	
弹片/Wire guard	Stainless steel	
导电针/Conductor	Red copper, Tin plated	

linear dimension(Tolerances Standard GB/T 14486-2008)												
	over	over	over	over	over	over	over	over	over	over	over	over
variable	6	10	18	30	50	80	120	160	200	250	all	over
range	to	to	to	to	to	to	to	to	to	to	to	to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5
												0.025
												0.06
												0.12
												0.4



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/
TITLE

WJ0404-03XX-1YY-00A



第三视角/THIRD ANGLE PROJECTION