

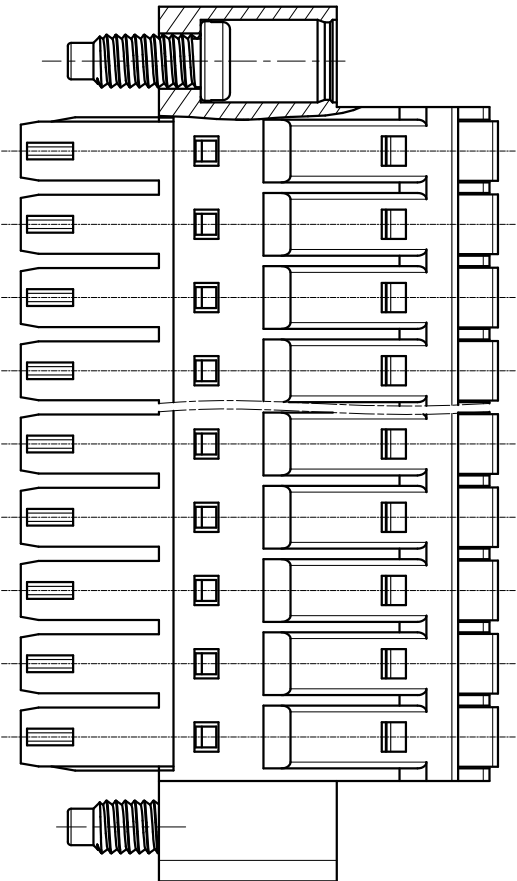
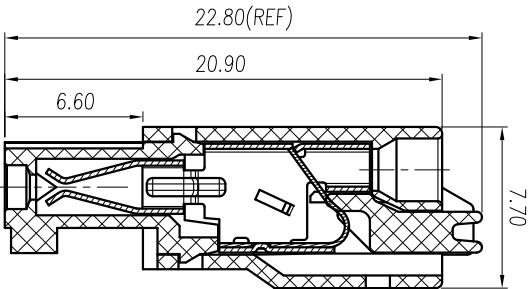


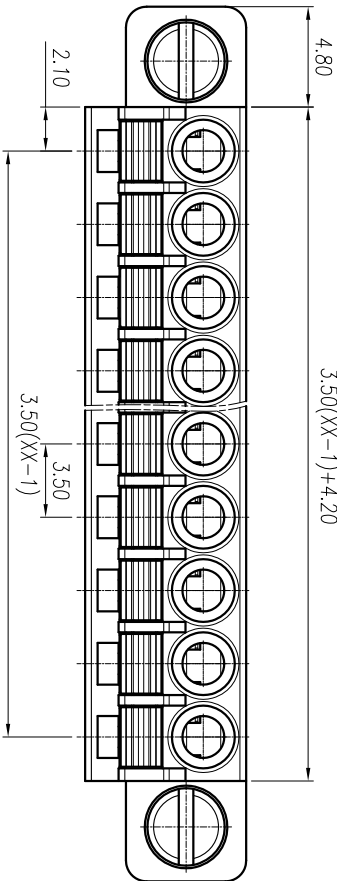

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

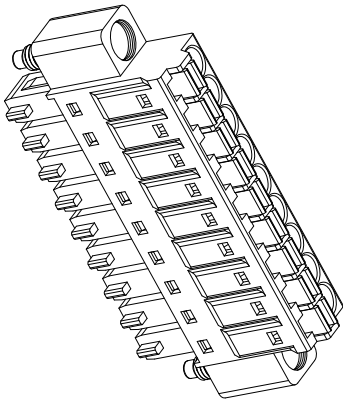

电气性能/Electrical

参考标准/Standard: UL IEC
额定电压/Rated voltage: 300V 250V
额定电流/Rated current: 8A 10A
接触电阻/Contact resistance: 20m Ω
使用线径/Wire range: 24-16AWG 1.0mm²
耐电压/Withstanding voltage: AC2000V/1Min
绝缘电阻/Insulation resistance: 500M Ω /DC500V
机械性能/Mechanical
温度范围/Temp Range: -40 $^{\circ}$ C⁺+105 $^{\circ}$ C
剥线长度/Strip length: 9-10mm

尺寸/Dimensions

间距/Pitch: 3.5mm,
极数/Poles: 2P-24P
材料及电镀/Material
塑件/Housing: P106, UL94V-0
夹片/Clamp: Phosphor bronze, Tin plated
弹片/Strapnel: stainless steel
螺丝/Screw: M3, 0. steel Zn plated
固定螺丝/Fix screw: steel Zn plated

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to	over	to	over	to	over	to	over	to	over	to
	6	10	18	30	50	80	120	160	200	250	all
tolerance	± 0.1	± 0.14	± 0.19	± 0.25	± 0.32	± 0.43	± 0.57	± 0.72	± 0.88	± 1.05	± 1.25

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	第三视图/THIRD ANGLE PROJECTION
名称/TITLE	慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				WJ15EDGKM-3.5-XXP-1YY-00A