

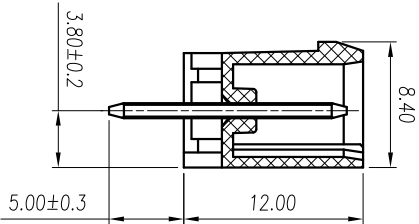
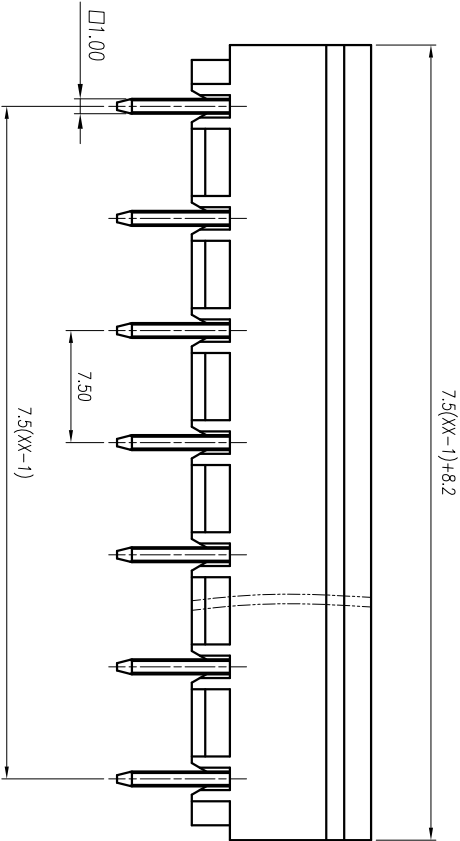
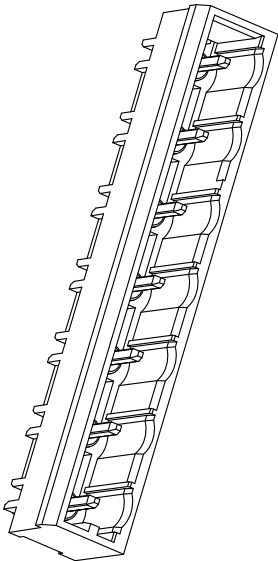


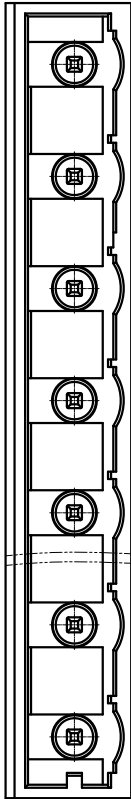

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

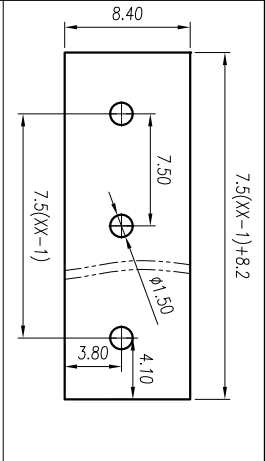

参考标准/Standard
额定电压/Rated voltage
额定电流/Rated current
接触电阻/Contact resistance
绝缘电阻/Insulation resistance
耐电压/With standing voltage
机械性能/Mechanical
温度范围/Temp.Range
瞬时温度/Max Soldering
尺寸/Dimensions
间距/Pitch
极数/Poles
材质及电镀/Material
塑件/Housing
焊脚/Pin header

UL IEC
300V 450V
15A 20A
20mΩ
5000Ω/DC500V
AC 2000V/1Min
-40℃~+105℃
+250℃ for 5 Sec
7.5mm
2-24p
PA66, UL94V-0
Brass, Tin plated

linear dimension(Tolerances Standard GB/T 14486-2008)															≡	—	□	//	⊥
variable range	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	over 250 to all	over 5 to 30	over 30 to 120	over 120 to						
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4			

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	2:1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					
名称/TITLE	WJ0602-01XX-1YY-00A				

第三视角/THIRD ANGLE PROJECTION

