

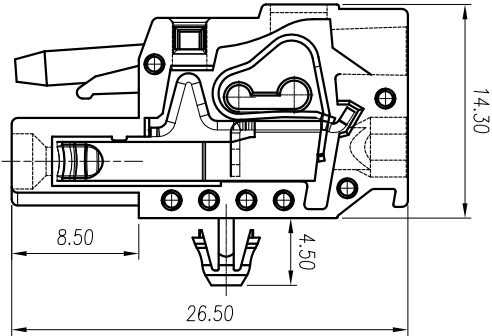
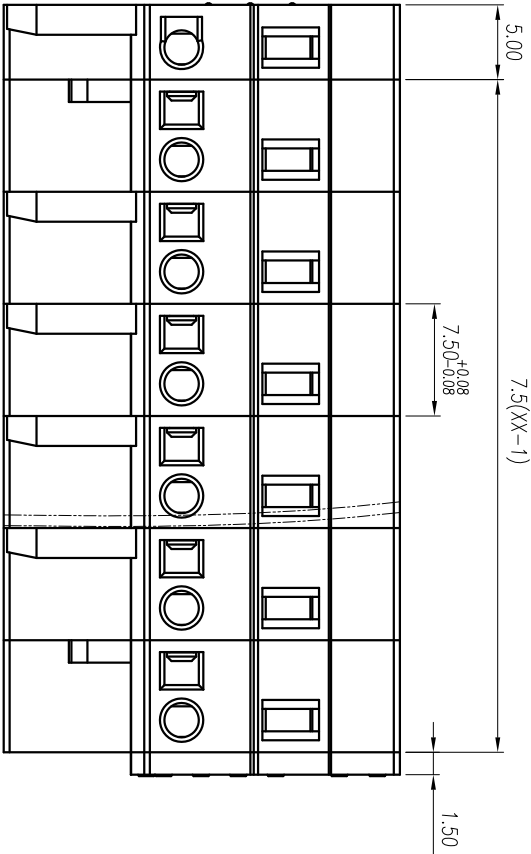
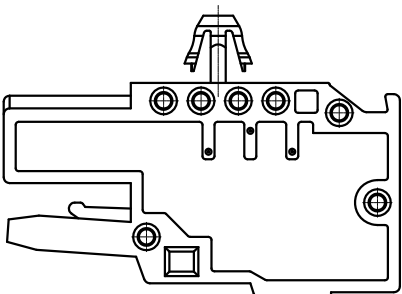


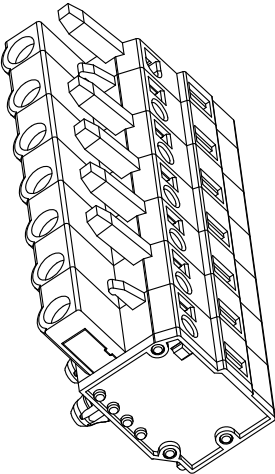

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

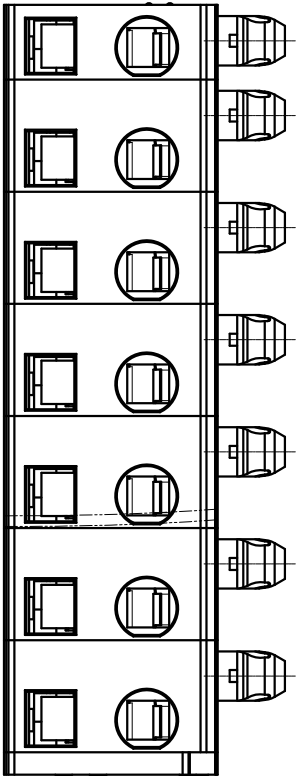

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	250V
额定电流/Rated current	15A	12A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	28-12AWG	2.5mm ²
耐电压/With standing voltage	AC 2000V/1 Min	
机械性能/Mechanical	8-9mm	
剥线长度/Strip Length	40°C+105°C	
温度范围/Temp Range		
尺寸/Dimensions		
极数/Poles	2-24P	
材质及电镀/Material	PA66, UL94V-0	
零件/Housing	Phosphor bronze, Tin plated	
夹子/Clamp	Stainless steel	
弹片/Wire guard		

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to	over 6	over 10	over 18	over 30	over 50	over 80	over 120	over 160	over 200	over 250
	6	to 10	to 18	to 30	to 50	to 80	to 120	to 160	to 200	to 250	all
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	2:1
第三视角/THIRD ANGLE PROJECTION					
名称/TITLE	WJ00601-03XX-1YY-00A				