

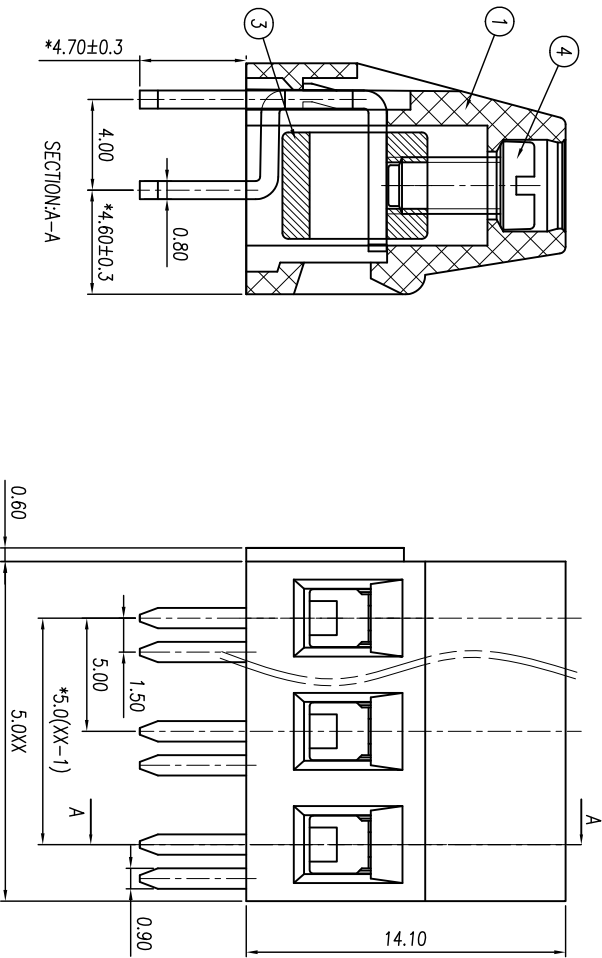


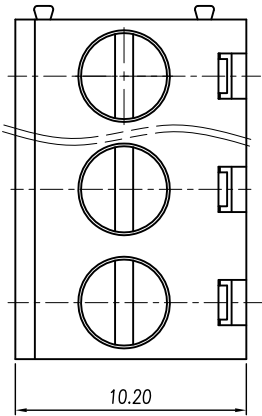

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

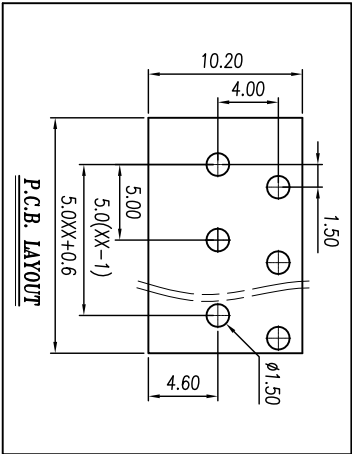

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over	over	over	over	over	over	over	over	over	over	
variable	6	10	18	30	50	80	120	160	200	250	
range	to	to	to	to	to	to	to	to	to	to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	4:1
第三视角THIRD ANGLE PROJECTION					
名称 / TITLE	WJ128E-5.0-XP-1YY-00A				

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	250V
额定电流/Rated current	16A	18A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	22~12AWG	2.5mm²
耐电压/With standing voltage	AC 2000V/1 Min	
机械性能/Mechanical		
扭矩/Torque	0.4Nm(3.6Lb.in)	
剥线长度/Steip Length	6-7mm	
温度范围/Temp.Range	-40°C~+105°C	
瞬时温度/MAX Soldering	+250°C, for 5 Sec	
尺寸/Dimensions		
间距/Pitch	5.0mm	
极数/Poles	2~24p	
材质及电镀/Material		
塑件/Housing	PA66, UL94V-0	
螺丝/Screws	M2.5 Steel Zn plated	
焊脚/Pin header	Brass 0.8t Tin plated	
方块/Cage	Brass Ni plated	



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD