






慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET


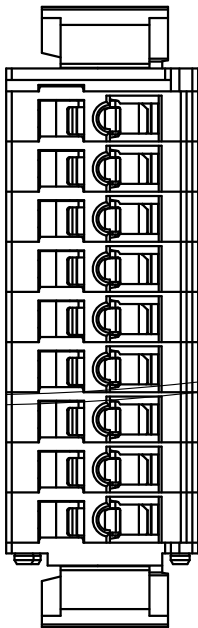


3.5XX+11.8(REF)

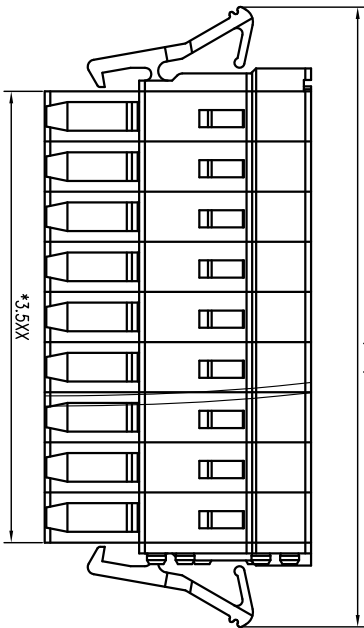

*3.5XX

*3.50±0.08

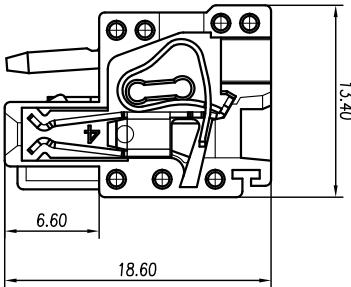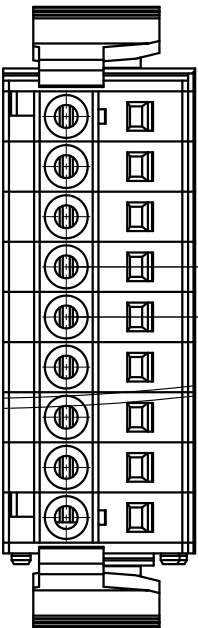

13.40

18.60

6.60

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	130V
额定电流/Rated current	10A	10A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	28~14AWG	1.5mm ²
耐电压/With standing voltage	AC 2000V/1 Min	
机械性能/Mechanical		
剥线长度/Strip Length	8-9mm	
温度范围/Temp Range	-40°C~+105°C	
尺寸/Dimensions		
间距/Pitch	3.5mm	
极数/Poles	2-24p	
材质及电镀/Material	PA66, UL94V-0	
塑件/Housing	Stainless steel	
弹片/Wire guard	Phosphor bronze, Tin plated	
夹子/Clamp		

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to	over	to	over	to	over	to	over	to	over	to
	6	6	10	10	18	30	50	80	120	160	200
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	2:1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					第三视角THIRD ANGLE PROJECTION
名称/TITLE	WJ0201-02XX-1YY-00A				