

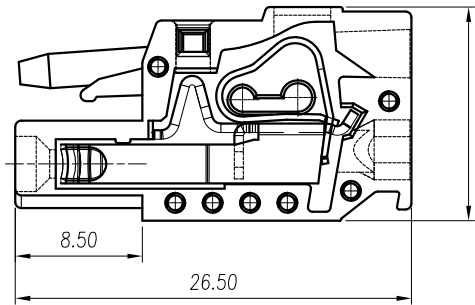
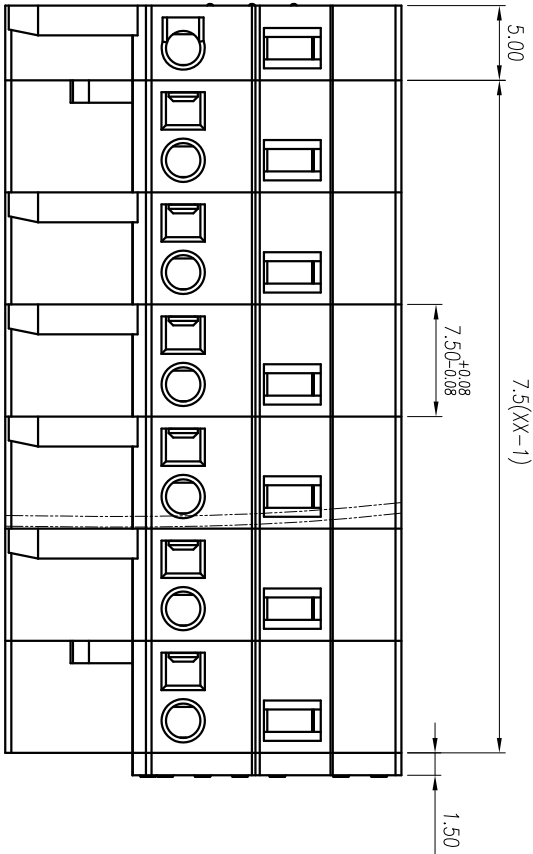
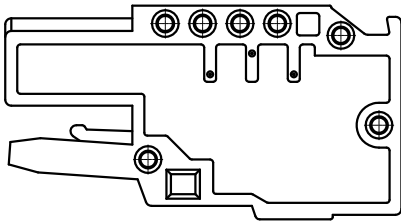


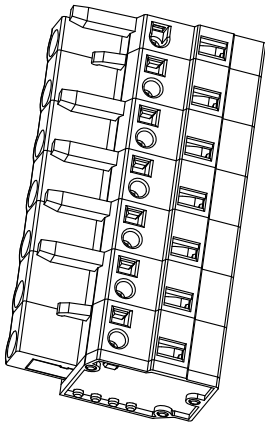

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

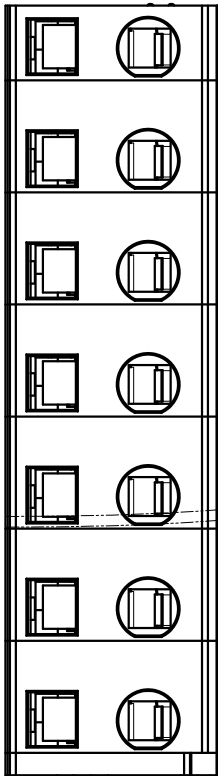

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	250V
额定电流/Rated current	15A	12A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	28-12AWG	2.5mm ²
耐电压/With standing voltage	AC 2000V/1 Min	
机械性能/Mechanical		
剥线长度/Strip length	8.9mm	
温度范围/Temp.Range	-40℃~+105℃	
尺寸/Dimensions		
极数/Poles	2-24p	
材质及电镀/Material	PA66, UL94V-0	
塑件/Housing	Phosphor bronze, Tin plated	
夹子/Clamp	Stainless steel	
弹片/Wire guard		

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to 6	over 6	to 10	over 10	to 18	over 18	to 30	over 30	to 50	over 50	to 80
	to 10	over 10	to 18	over 18	to 30	over 30	to 50	over 50	to 80	over 80	to 120
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	2:1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					第三视角/THIRD ANGLE PROJECTION
名称/TITLE	WJ00601-01XX-1YY-00A				