

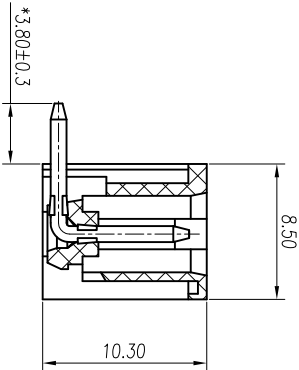


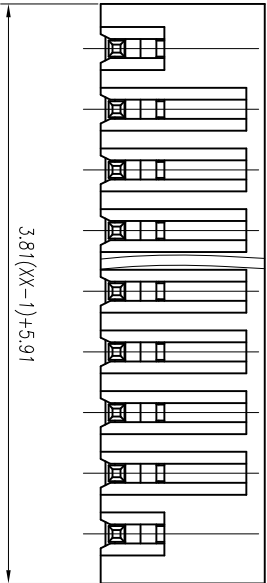


慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

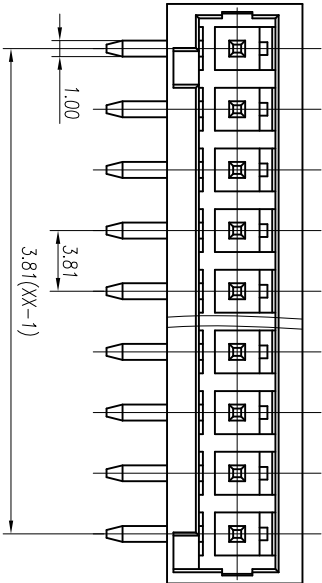

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	130V
额定电流/Rated current	10A	10A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
耐电压/Wrth standing voltage	AC 2000V/1 Min	
机械性能/Mechanical		
温度范围/Temp.Range		-40°C~+105°C
瞬时温度/MAX Soldering		+250°C for 5 Sec
尺寸/Dimensions		
间距/Pitch	3.81mm	
极数/Poles	2-24p	
材质及电镀/Material		PA66, UL94V-0
塑件/Housing		Brass, Tin plated
焊脚/Pin header		



linear dimension(Tolerances Standard GB/T 14486-2008)														≡	—	□	//	⊥
variable range	to	over	over	over	over	over	over	over	over	over	over	over	over	all	to	over	over	over
	6	6 to 10	10 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	200 to 250	250 to 250	5 to 30	30 to 120			5 to 30	30 to 120	120 to 120
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4		



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/
TITLE

WJ0302-02XX-1YY-00A

第三视角/THIRD ANGLE PROJECTION

