

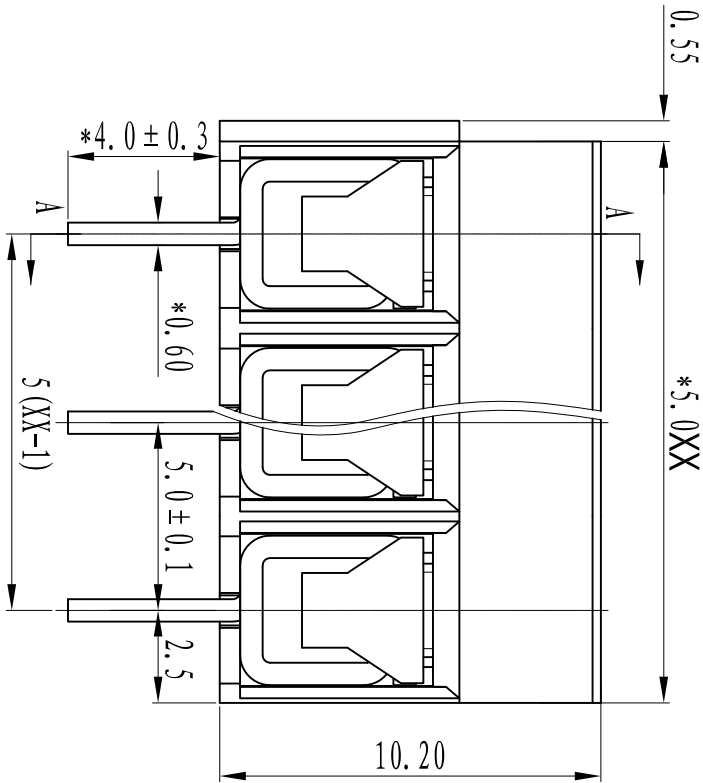
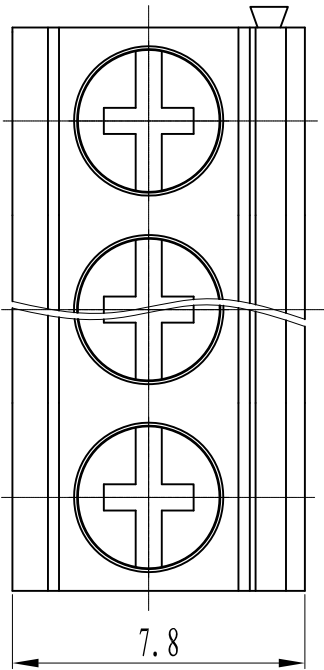


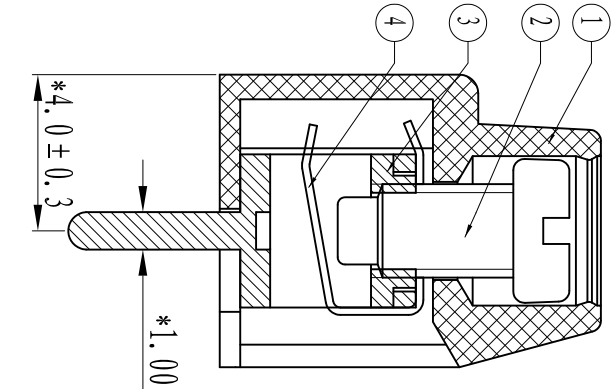

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

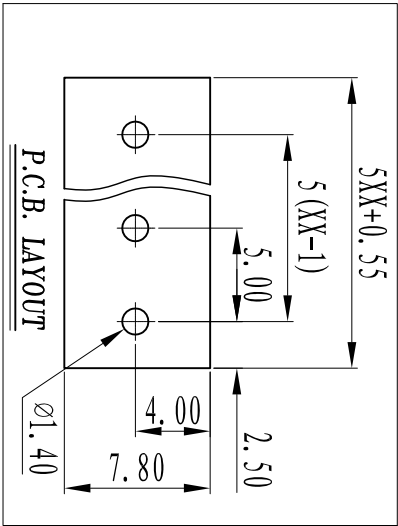

电 气 性 能 / Electrical

参考标准 / Standard	UL	IEC
额定电压 / Rated voltage	300V	250V
额定电流 / Rated current	8A	15A
接触电阻 / Contact resistance	20mΩ	
绝缘电阻 / Insulation resistance	500MΩ / DC500V	
使用线径 / Wire range	26~14AWG	1.5mm ²
耐 电 压 / With standing voltage	AC 2000V/1 Min	
扭 矩 / Torque	3 kgf.cm	
温度范围 / Temp.Range	-40°C~+105°C	
瞬时温度 / MAX Soldering	+250°C, for 5 Sec	
剥线长度 / Strip Length	6-7mm	
尺 寸 / Dimensions	5.0mm	
间 距 / Pitch	02~24p	
极 数 / Poles	PA66, UL94V-0	
材 质 及 电 镀 / Material	M2.5 Steel Zn plated	
塑 件 / Housing	Brass, Tin plated	
螺 丝 / Screws	Phosphor bronze, Ni plated	
焊 脚 / Pin header		
弹 片 / Shrapnel		

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over	over	over	over	over	over	over	over	over	over	over
variable	6	10	18	30	50	80	120	160	200	250	all
range	to	to	to	to	to	to	to	to	to	to	to
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	5:1
第三视角 / THIRD ANGLE PROJECTION					
名称 / TITLE	WJ126-5.0-XXP-1YY-00A				