

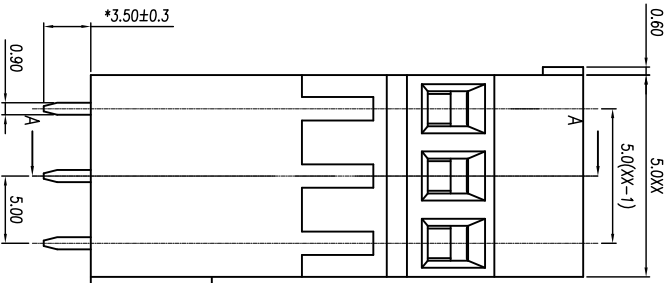



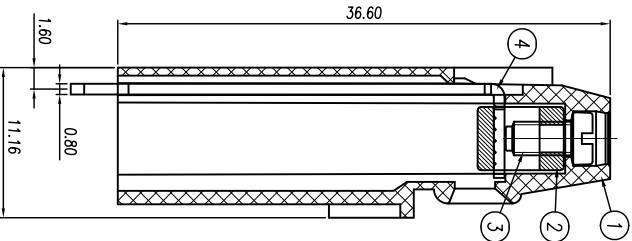

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

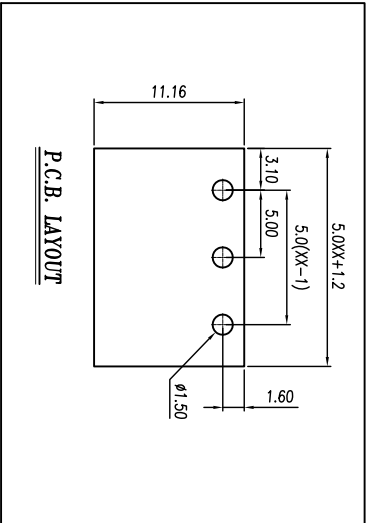

电 气 性 能/ Electrical

参考标准/ Standard

额定电压/ Rated voltage

额定电流/ Rated current

接触电阻/ Contact resistance

绝缘电阻/ Insulation resistance

使用线径/ Wire range

耐 电 压/ With standing voltage

机 械 性 能/ Mechanical

扭 矩/ Torque

剥线长度/ Strip Length

温度范围/ Temp. Range

瞬时温度/ MAX Soldering

尺 寸/ Dimensions

间 距/ Pitch

极 数/ Poles

材 质 及 电 镀/ Material

塑 件/ Housing

螺 丝/ Screws

焊 脚/ Pin header

方 块/ Cage

UL

300V

15A

20mΩ

500MΩ/DC500V

30~14AWG 1.5mm²

AC 2000V/1 Min

0.4Nm(3.6lb.in)

6-7mm

-40°C~+105°C

+250°C, for 5 Sec

5.0mm

2~24P

PA66, UL94V-0

M2.5, Steel, Zn plated

Brass, Tin plated

Brass, Ni plated

linear dimension(Tolerances Standard GB/T 14486-2008)

SECTION-A-A

	linear dimension(Tolerances Standard GB/T 14486-2008)	≡	—	□	∥	⊥
variable range	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43

第三视角/THIRD ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称 /
TITLE

WJE3K500-5.0-XXP-1YY-00A