

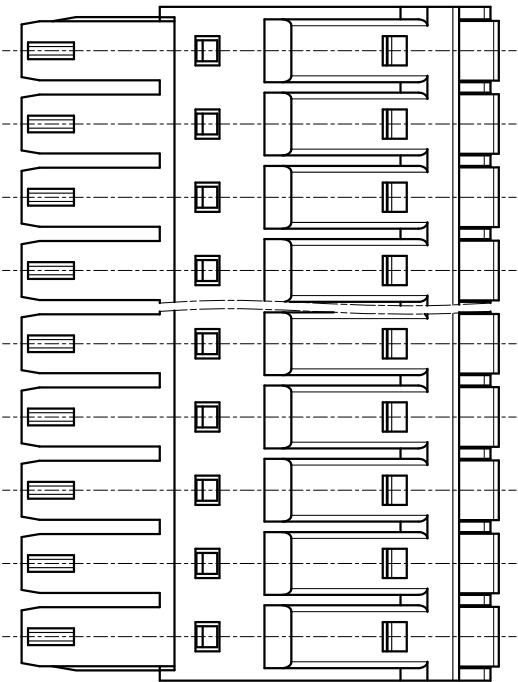
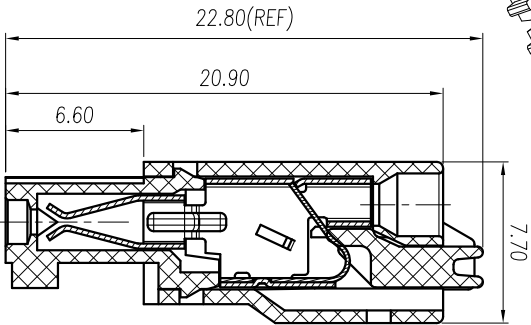


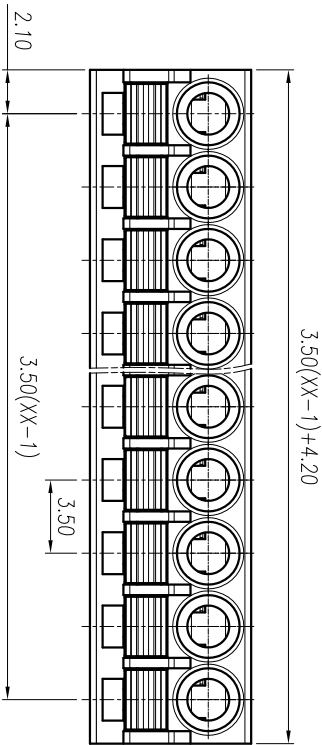

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

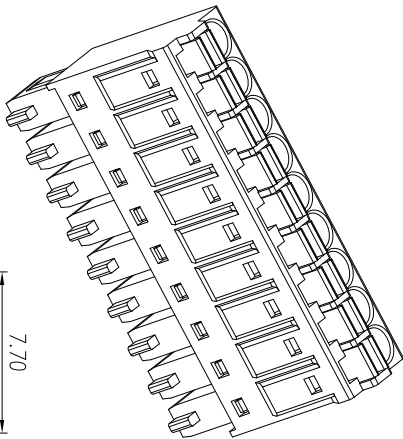

电 气 性 能/ Electrical

参考标准/ Standard: UL IEC

额定电压/ Rated voltage: 300V 250V

额定电流/ Rated current: 8A 10A

接触电阻/ Contact resistance: 20m Ω

使用线径/ Wire range: 24-16AWG 1.0mm²

耐电压/ Withstanding voltage: AC2000V/1Min

绝缘电阻/ Insulation resistance: 500M Ω /DC500V

机 械 性 能/ Mechanical

温度范围/ Temp.Range: -40 $^{\circ}$ C~+105 $^{\circ}$ C

剥线长度/ Strip length: 9-10mm

尺 寸/ Dimensions

间距/ Pitch: 3.5mm,

极数/ Poles: 2P-24P

材 质 及 电 镀/ Material

塑 件/ Housing: PA66, UL94V-0

夹片/ Clamp: Phosphor bronze, tin plated

弹片/ shrapnel: stainless steel

linear dimension(Tolerances Standard GB/T 14486-2008)												
	over	over	over	over	over	over	over	over	over	over	over	over
variable range	6 to	10 to	18 to	30 to	50 to	80 to	120 to	160 to	200 to	250 to	all to	over 5 to 30 to 120
tolerance	± 0.1	± 0.14	± 0.19	± 0.25	± 0.32	± 0.43	± 0.57	± 0.72	± 0.88	± 1.05	± 1.25	0.5 0.025 0.06 0.12 0.4

单位/ UNITS	mm	尺寸/ SIZE	A4	比例/ SCALE	第三视角/THIRD ANGLE PROJECTION
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					名称/ TITLE WJ15EDGKM-3.5-XXP-1Y-00A