

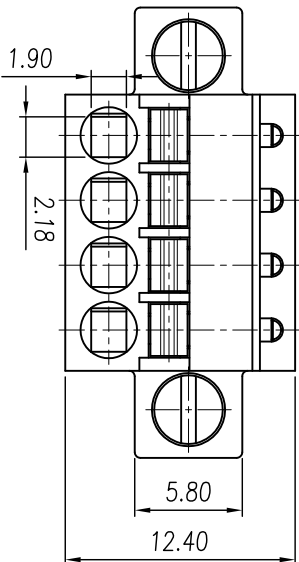
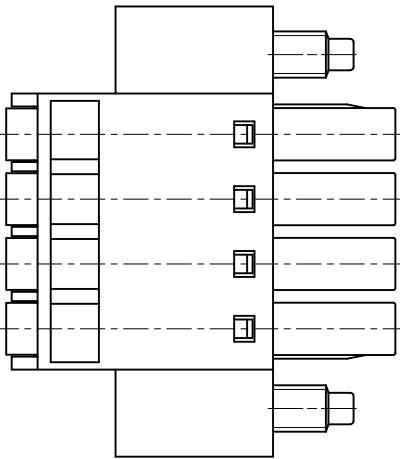


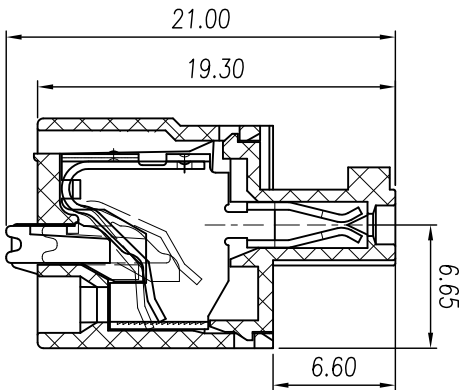

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
THE SPEC SHEET

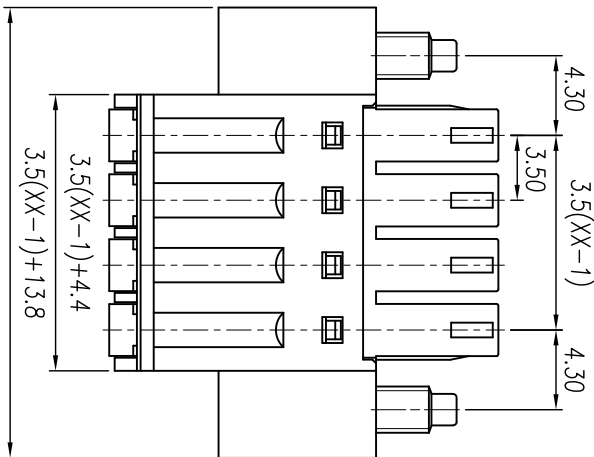

参考标准/Standard	UL
额定电压/Rated voltage	300V
额定电流/Rated current	8A
接触电阻/Contact resistance	20mΩ
绝缘电阻/Insulation resistance	500MΩ/DC500V
使用线径/Wire range	28~16AWG 1mm ²
耐电压/With standing voltage	AC 2000V/1 Min

机械性能/Mechanical

剥线长度/Steip Length	7-8mm
温度范围/Temp Range	-40°C~+105°C
扭矩/Torque	0.4Nm(3.6lb.in)

尺寸/Dimensions

间距/Pitch	3.5mm
极数/Poles	2~24p

材料及电镀/Material

塑件/Housing	PA66, UL94V-0
螺丝/Screws	M2.5 Steel, Zn plated
夹子/Clamp	Phosphor bronze, Ni plated
弹片/Wire guard	Stainless steel

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	over 6	over 10	over 18	over 30	over 50	over 80	over 120	over 160	over 200	over 250	all to 5	over 5	over 30	over 120		
	to 10	to 18	to 30	to 50	to 80	to 120	to 160	to 200	to 250							
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

第三视角/THIRD ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/TITLE
WJ15EDGJDM3.5-XXP-1YY-00A