

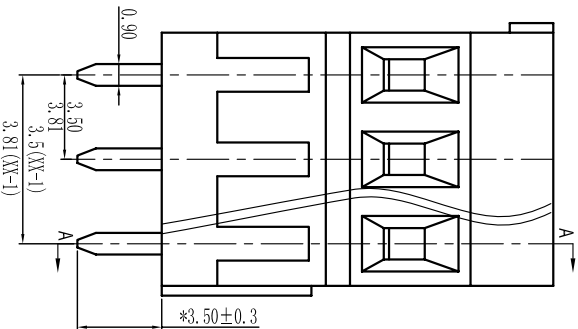
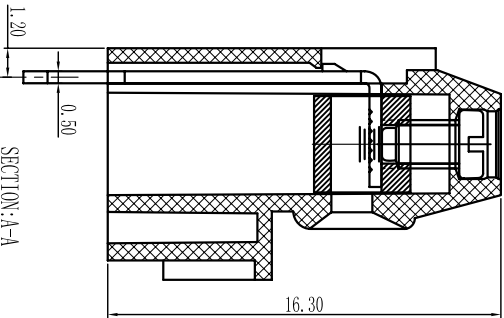


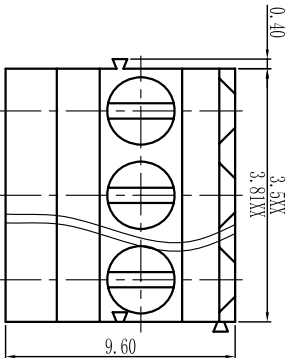


慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

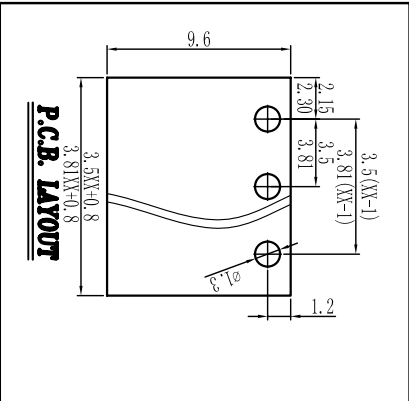

订购方式：
HOW TO ORDER

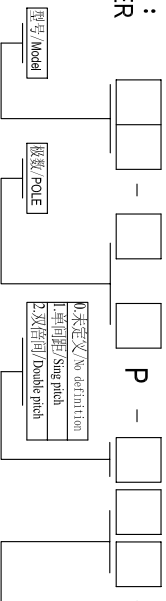

电 气 性 能/Electrical
参考标准/Standard: UL IEC
额定电压/Rated voltage: 300V 250V
额定电流/Rated current: 15A 15A
接触电阻/Contact resistance: 20mΩ
使用线径/Wire range: 28-16AWG 1.0mm²
耐电压/Withstanding voltage: AC2000V/1Min
绝缘电阻/Insulation resistance: 500MΩ/DC500V

机 械 性 能/Mechanical
温度范围/Temp.Range: -40° C~+105° C
扭 矩/Torque: 0.4Nm (3.54lb`in)
剥线长度/Strip length: 4-5mm

尺 寸/Dimensions
间距/Pitch: 3.50mm, 3.81mm
极数/Poles: 2P-24P

材 质 及 电 镀/Material
塑 件/Housing: PA66, UL94V-0
螺 丝/Screws: M2, 0, steel Zinc plated
方 块/Cage: Brass, Ni plated
焊 脚/Pin header: Brass, Snle plated

客户需求
Custom Request

灰色/Gray	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	棕色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

linear dimension(Tolerances Standard GB/T 14486-2008)														≡	—	□	//	⊥