

1/2"


Max. 50-60 l/min



Polypropylene (PP)




Ready for Future

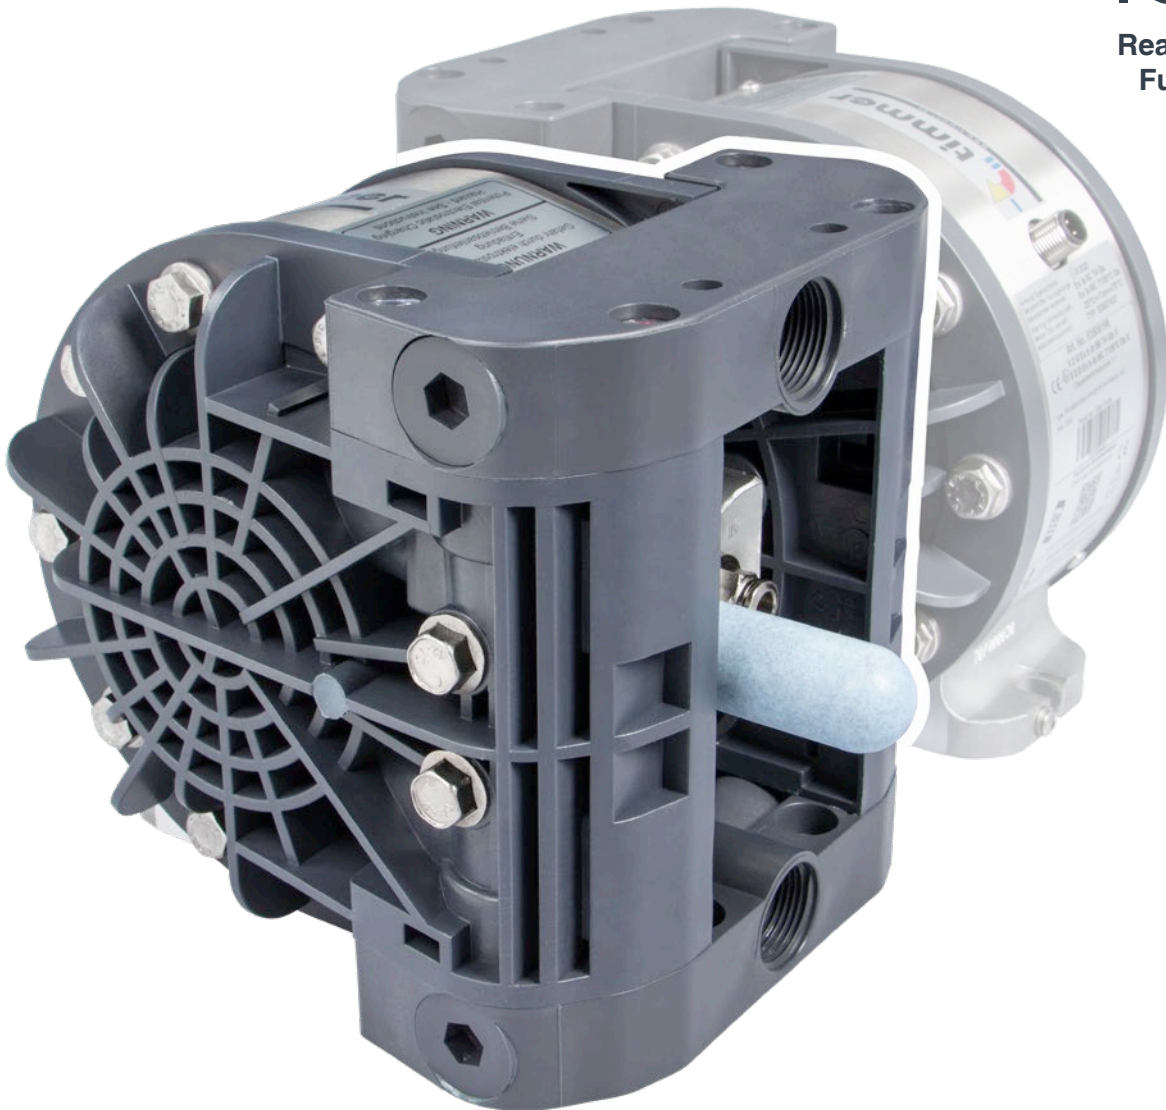

[www.timmer-pumps.com/en/double\\_diaphragm\\_pumps\\_1to1/](http://www.timmer-pumps.com/en/double_diaphragm_pumps_1to1/)




Integrated intelligent sensor (iHZ)



Gravity-loaded valve balls

# Double diaphragm pump

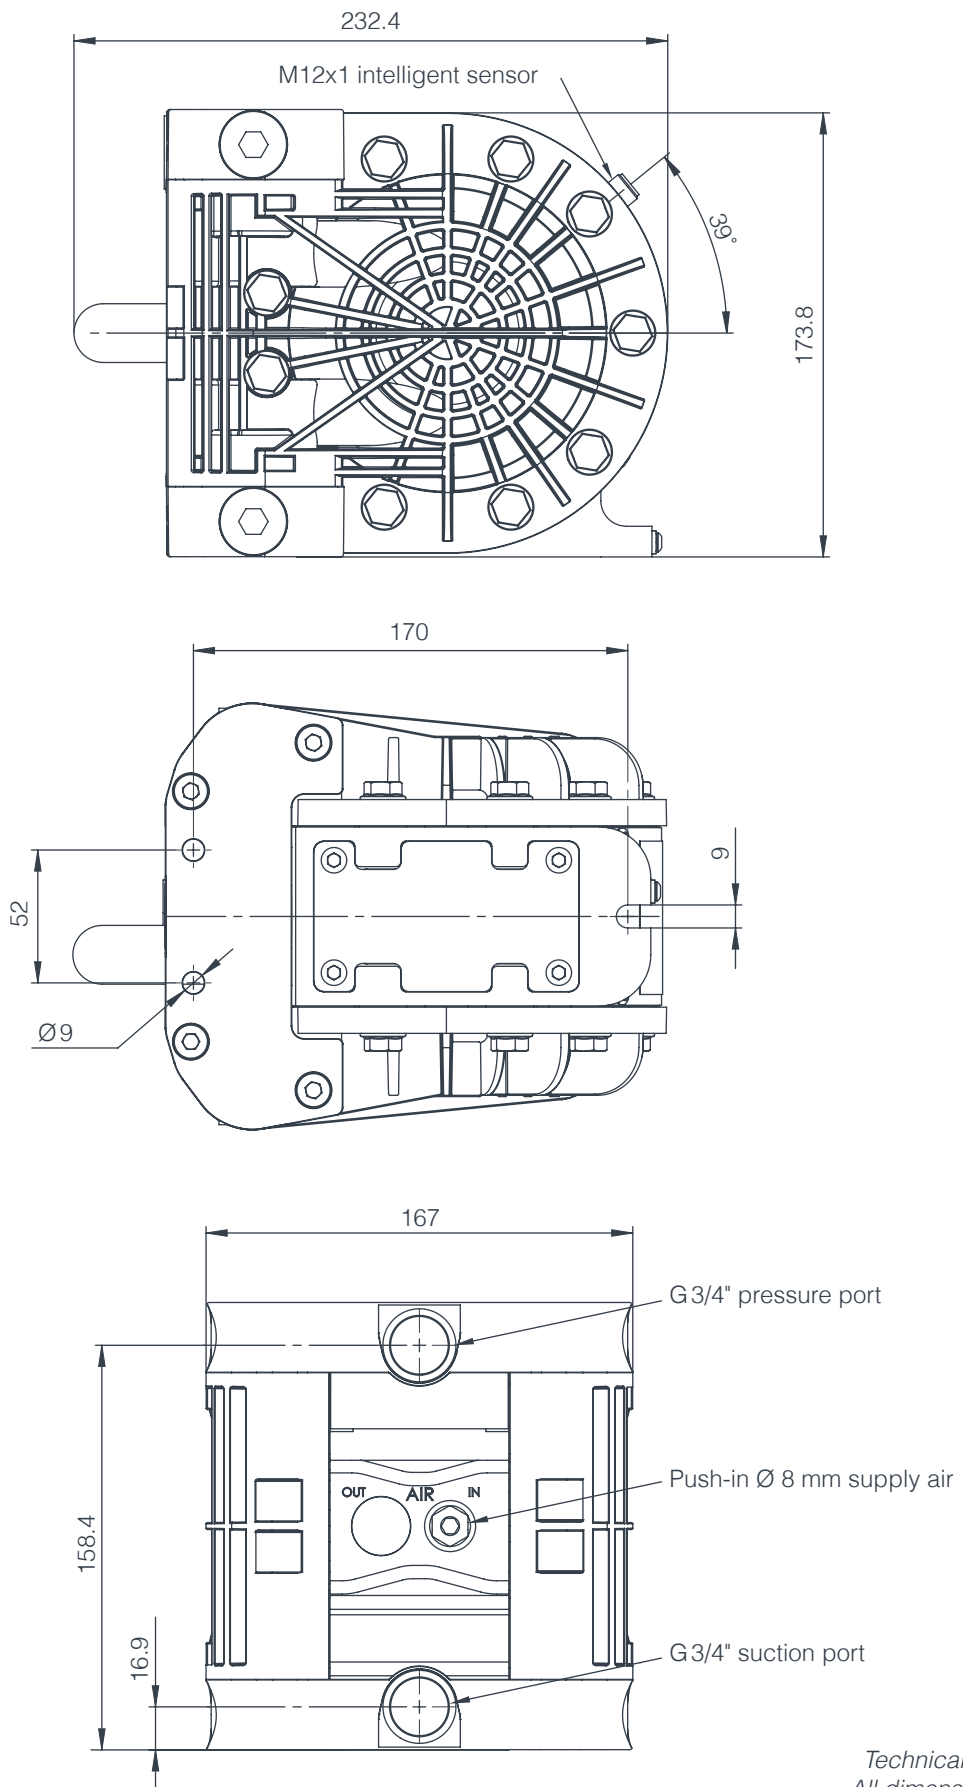

Technical drawing:  
All dimensions in mm

## PREMIUM double diaphragm pumps PTI-MEM1060V-PP

Order no.	Type		Alignment of suction pipe	Alignment of pressure pipe	Material design	ATEX
53509198	PTI-MEM1060V-PP5-EP-TF-PV-FKM-AL-iHZ		Forward	Forward	PP	
53509189	PTI-MEM1060V-PP1-EP-TF-PV-FKM-AL-iHZ		Forward	Forward	PP (conductive)	✓

The tim<sup>®</sup>PRO series pumps have been successfully used for many years as process pumps and transfer pumps in the paint supply sector and in the printing machine industry. They are characterized in particular by their process reliability, easy maintenance, small and compact design, good

workmanship and long service life. These variants are delivered with an intelligent IoT-enabled sensor, which allows real-time testing of the stroke signals via a customer PLC. With connection of our tim<sup>®</sup>IOT smartbox we enable many useful new features increase profitability, process reliability and facilitate preven-

tive maintenance. Simply integrate our tim<sup>®</sup>IOT smartbox in your system and benefit from these advantages. All information in this regard is provided starting on page 84.

### Technical data

Transmission ratio	: 1 to 1
Output (max.)	: Approx. 60 l/min and approx. 50 l/min with ATEX version (for water)
Drive	: Pneumatic
Connections for fluids	: G 3/4" internal thread
Operating pressure	: 1 to 7 bar compressed air, unoled, filtered, or oiled (1 to 4 bar for ATEX version)
Compressed air connection	: Plug connector, hose outer Ø 8 mm
Suction head, dry	: Max. 4 m
Weight	: Approx. 4 kg
Viscosity of pumped medium	: Up to 15,000 mPas
Medium temperature	: Max. 5 °C to 60 °C
Noise level	: 64 dB(A) 20 DH/min 0.1 MPa
Strokes	: Max. 7 double strokes/s Max. 6 double-strokes/s for ATEX version

### Media

The pump is suitable for pumping a wide variety of fluids (media). Resistance to the media that will be pumped must be checked on a case-by-case basis.


We would be happy to advise you on the suitability for your specific application.

### Material

Side section	: PP
Middle housing section	: Aluminium
Fluid seals	: FPM
Pneumatic seals	: NBR
Valve seats	: PVDF
Valve balls	: PTFE
Diaphragm	: EPDM
Control valves	: Ceramic / POM
Screws	: Stainless steel
Cover plate	: Stainless steel
Valve pipes	: PP
Springs	: None



## Fluid delivery volume

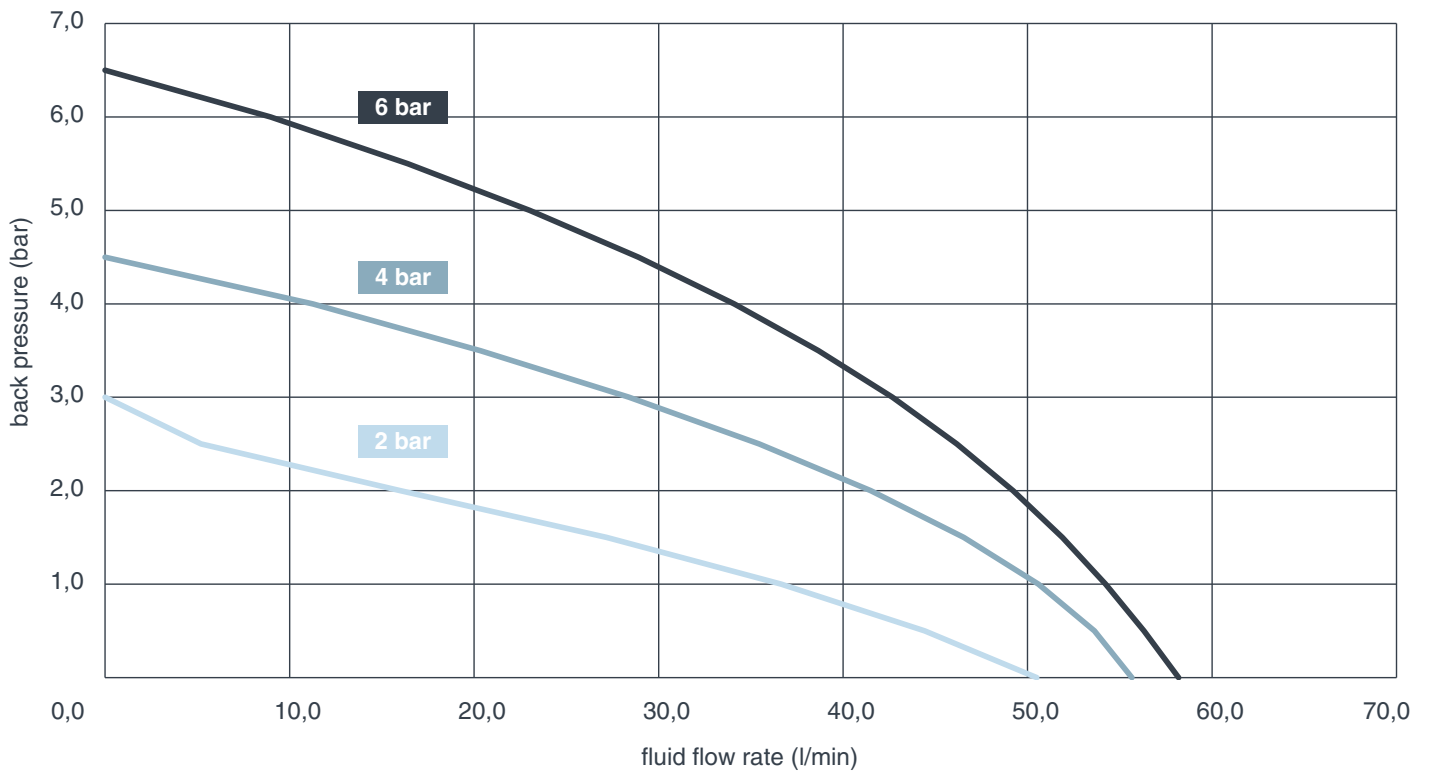

## Added values



### Minimum pulsation

Minimal changeover times in conjunction with the short-stroke principle of the pumps reduce pulsation to a minimum and ensure a more uniform media flow.



### Maximisation of service life

The ceramic slide valve that is used works virtually free of wear. The short-stroke principle prevents over-extension of the diaphragm and thus enables a long service life.



### Increased process reliability

Safe start-up of the pump is ensured, even in critical operating situations. The bistable, over-centre valve prevents problematic intermediate positions of the control valve.



### Reduced compressed air costs

Optimised geometries with minimal dead spaces, as well as the extremely low start-up pressures, starting at 0.7 bar, reduce energy consumption to a minimum.



### Easy conversion in existing systems

Small, compact design thanks to optimised valve technology



### Minimal maintenance costs

The durable short-stroke diaphragms, the low-wear ceramic slide valve and the maintenance-friendly structure of the pump guarantee extremely low service costs.